


ANNEX 30 - TRAPEZ 250/40 (ICON-A.H.M) (Ref. RX1)

MACROLUX® ROOFLITE® TRAPEZ 250/40


Section

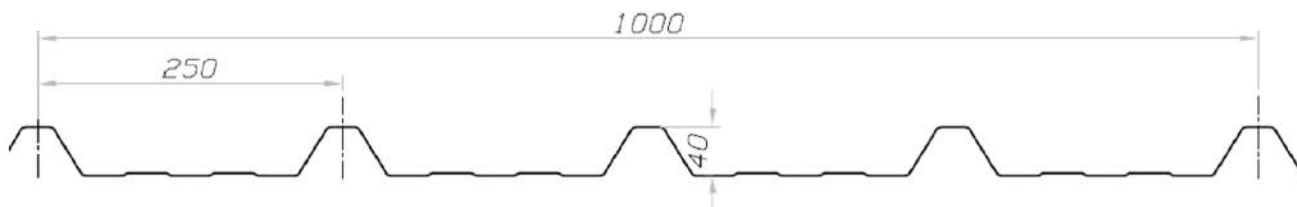

✓ ICON TYPE PRODUCED to A.H.M ROOFING, CLADDING CO. WWW.AHM-PC.COM

THICKNESSES	1.0 mm & 0.8 mm
WEIGHT	1.50 kg/m ² & 1.2 kg/m ²
WIDTH	Nominal (Sheet max) 1.05 m
	Useable 1.00 m
LENGTH	3.6m , 4.5m and 6 m ,, OR ANY OTHER LENGTH IN THE BIG ORDERS ONLY.
AVAILABLE COLOURS	CLEAR O
THERMAL EXPANSION	0.065 mm/m °C (6.5 x 10 ⁻⁵ 1/°C)
MINIMUM RADIUS OF CURVATURE	9.000 mm
MINIMUM SLOPE	5%
RECOMMENDED FIXING	Self-drilling 6.3x80mm with EPDM gasket (every 250 mm) Self-tapping for wood 6.5x100mm with EPDM gasket (max every 250 mm) Seaming plug (max every 300 mm)
SPACER MADE OF FOAMED PE	Not available

✓ **BREAKING STRENGTH VALUES (*) FOR EVENLY DISTRIBUTED LOADS**

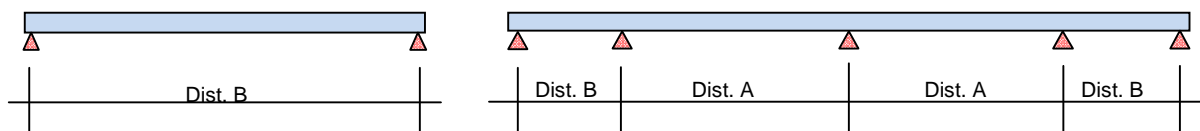

Thickness mm	Distance A				Distance B			
	600 N/m ²	900 N/m ²	1.200 N/m ²	1.500 N/m ²	600 N/m ²	900 N/m ²	1.200 N/m ²	1.500 N/m ²
1.0	1.500	1.350	1.250	1.200	1.200	1.050	1.000	950

(*) Breaking strength values (safety coefficient 1.5)

Purchase of MACROLUX® ROOFLITE® sheets is subject to reserves, please check general sales conditions from our offices. Customised lengths manufactured upon minimum amounts of order. Colours provided per request upon minimum amounts of orders. Illustrative drawings, check tolerance (weight, dimensions, width, pitch) from our offices.

For further laying conditions see the MACROLUX® ROOFLITE® technical manual.

All other company or product names, herein mentioned are registered trademarks belonging to the owners in question.